



# **SPIDER<sup>®</sup>**


## **SUPPORTS AND SPACERS**

# **Medium Angle Bracket**

## ***Model ABMD***

1,500lb Load

**Available in 304 or 316 Stainless Steel**  
Carbon Steel ASTM A36 with Bituminous, Hot Dipped Galvanized, Epoxy or Plain

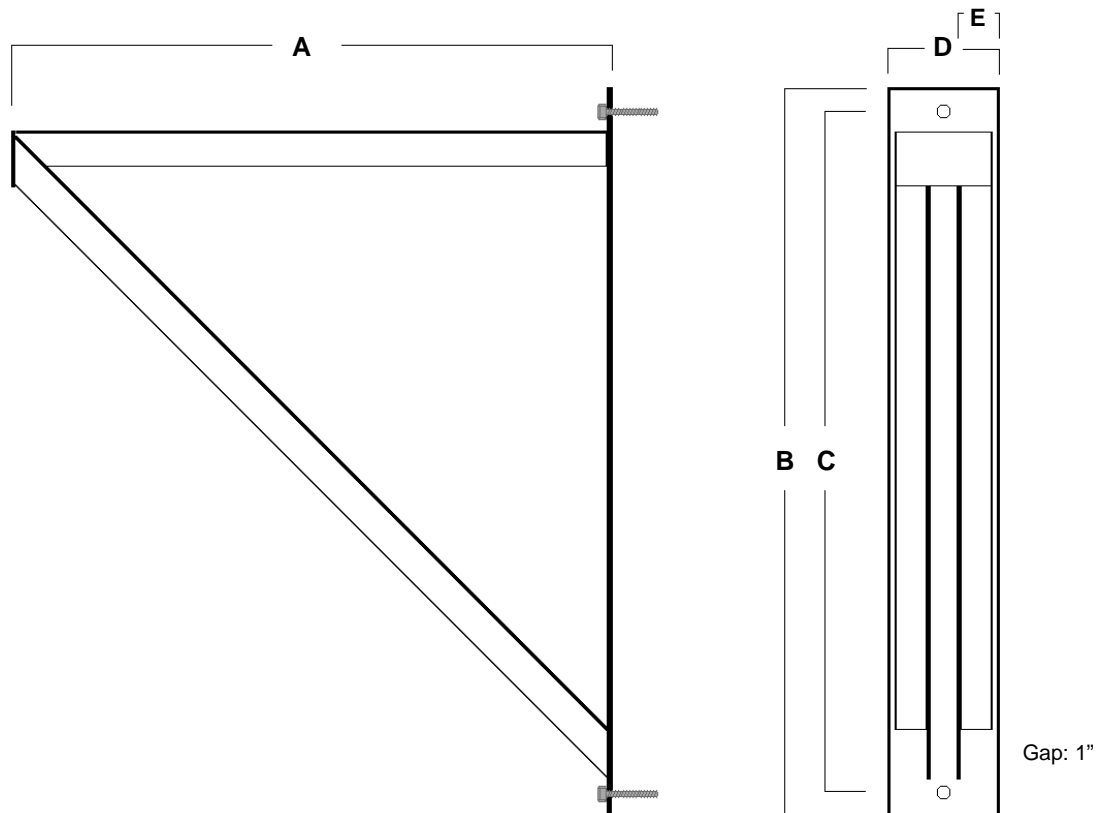

[www.SpiderPipeSupports.com](http://www.SpiderPipeSupports.com)

PO BOX 81 - BUTNER, NC 27509 - 919-575-0414 PHONE - 919-575-0420 FAX - 1-800-957-7433  
CustomerService@SpiderPipeSupports.com

# Medium Angle Bracket

## *Model ABMD*

### Dimensions

Part Number	A	B	C	D	E	Hole Di
ABMD_-12	12"	18"	15-1/2"	4"	1-1/2"	13/16"
ABMD_-18	18"	24"	21-1/2"	5"	1-3/4"	13/16"
ABMD_-24	24"	30"	27-1/2"	5"	2"	13/16"

Additional Customization available to suit project needs

### Part Numbers

Stainless Steel 304 Type **ABMDSS-** *Width(A)*

Stainless Steel 316 Type **ABMDSS(316)-** *Width(A)*

Galvanized Type **ABMDG-** *Width(A)*

Bituminous Type **ABMDB-** *Width(A)*

Epoxy Type **ABMDE-** *Width(A)*

Plain Finish Type **ABMDP-** *Width(A)*

### Installation

Max Load 1,500lbs

Determine appropriate size needed (Column A) according to project needs

For Top Load Support, use U-Bolt or Strap attachment with appropriate hardware (Sold Separately)

For Bottom Load Support, suspend pipe with pipe hangers and appropriate attachments (Sold Separately).

Wedge Anchor Bolts available for purchase

[www.SpiderPipeSupports.com](http://www.SpiderPipeSupports.com)

PO BOX 81 - BUTNER, NC 27509 - 919-575-0414 PHONE - 919-575-0420 FAX - 1-800-957-7433  
CustomerService@SpiderPipeSupports.com